

DOOR CLOSER

DHDC-5600



Overview

The DHDC 5600 Series is designed for light- to medium-duty applications, like a small business or office building. It is intended for interior use with aluminum storefronts and mixed-use complexes. It mounts three ways and features the most common hole pattern in the door control industry, making it ideal for a variety of retrofit needs.

The DHDC5600 Series features a single-piece cast aluminum body and a 1-3/8" heat-treated steel piston, a heat-treated pinion and staked valves. This Series standard door closer is certified ANSI/BHMA A156.4 Grade 1, is UL listed and is backed by a 10-year warranty.

* Compare to: Norton 1600 series, LCN 1260, Sargent 1130, Dorma 7400 Series, Yale 50BC series, Arrow 900N series, Stanley D1650, Lawrence LH5016.

Size: - 1-6 adjustable

Certifications:

- BHMA Certified ANSI A156.4, adjustable sizes 1-6
- ADA Compliant ANSI A117.1 Accessibility Code
- UL/cUL Listed for up to 3 hours
- UL10C Positive Pressure Rated
- UL10B Neutral Pressure Rated
- 10-year Warranty

Material:

- Aluminum Alloy
- The recommended temperatures for prolonged closer use is between -40° F (-42° C) and 150° F (66° C)

Cover:

- Full plastic cover - Standard
- Slim line plastic cover - Optional
- Full size plated metal cover - Optional

Springs:

- Double heat treated steel, tempered springs
- Precision machined, heat treated steel piston

Valves:

- Adjustable latching and sweep speed valves
- Adjustable backcheck valve - Standard
- Delayed action valve - Optional
- Staked valves - Standard

Handing: - Non-Handed

Arms & Brackets:

- Tri-Pack - Regular, parallel arm, and top jamb mount - Standard
- 15% power adjustment in standard arm for regular and top jamb mount

Optional Arms:

- Hold Open Arm
- Extra Heavy Duty Hold Open Stop Arm
- Extra Heavy Duty Stop Arm

DOOR CLOSER

DHDC-5600

DH


- Extra Heavy Duty Arm
- Extra Heavy Duty Hold Open Arm
- Extra Heavy Duty Cushion Stop Arm
- Extra Heavy Duty Hold Open Cushion Stop Arm

Fasteners: - Self-reaming, self-tapping wood and machine screws
- Sex nuts and bolts

Door Thickness: - 1-3/4" (44 mm)
- 1-3/8" - 2-1/4" (36 mm - 57 mm) - Optional

Finishes: - ALM, BLK, BRZ, DBZ, GOL
- Rust inhibiting primer - Standard

Notes: - Used on doors with a maximum weight of 250 lbs.

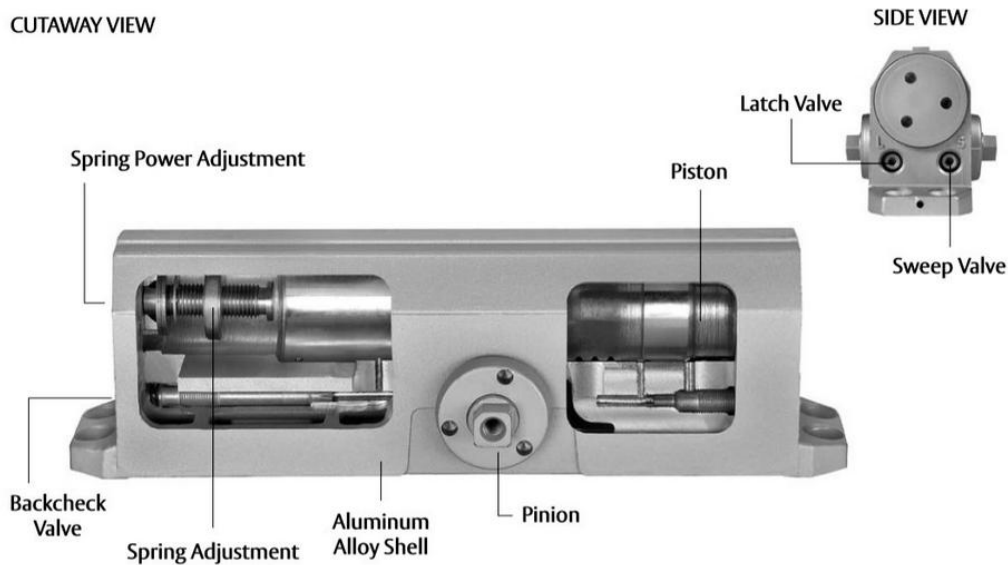

Spring omitted for illustration purposes

